



# Owners Manual

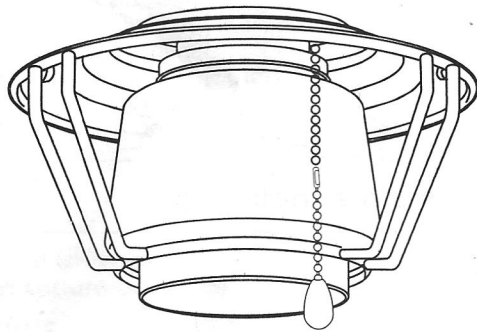


Total light kit weight  
1.8 KGS.  
4 LBS

**MODEL 151**

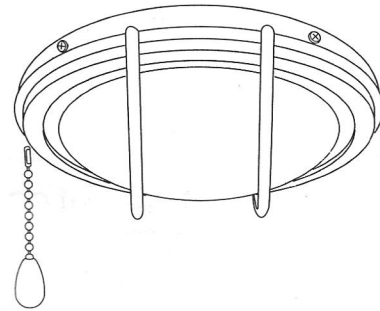


Total light kit weight  
2.0 KGS.  
4.41 LBS

**MODEL 163**

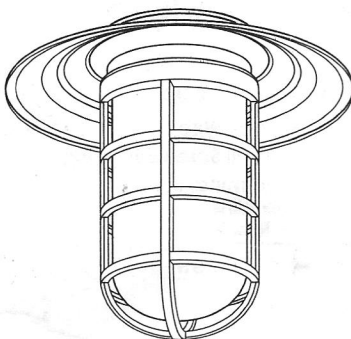


Total light kit weight  
2.5 KGS.  
5.52 LBS

**MODEL 152**

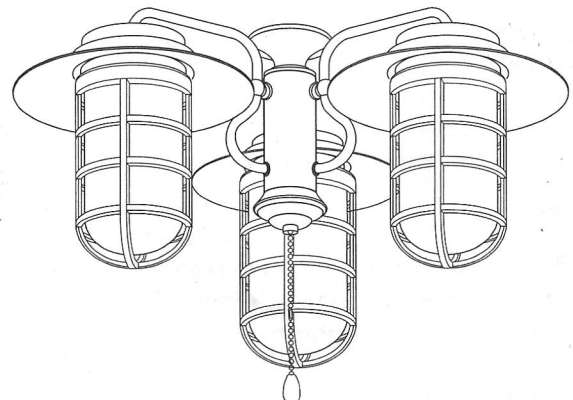


Total light kit weight  
4.5 KGS.  
9.92 LBS

**MODEL 352**

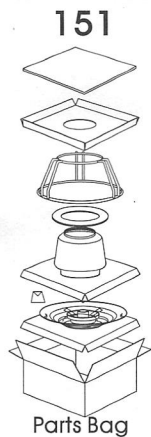


Parts Bag

Pull Chain Knob	1pc.
Wire nuts	2pcs.
Hex Nut	1pc.
Spring Washer	1pc.
Small Screw	
Driver	1pc.

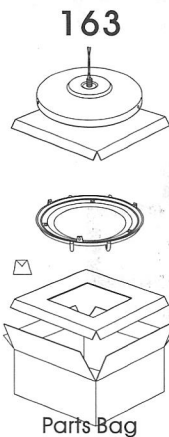


Parts Bag

Pull Chain Knob	1pc.
Wire nuts	2pcs.
Hex Nut	1pc.
Spring Washer	1pc.
Screws	3pcs.
Small Screw	
Driver	1pc.

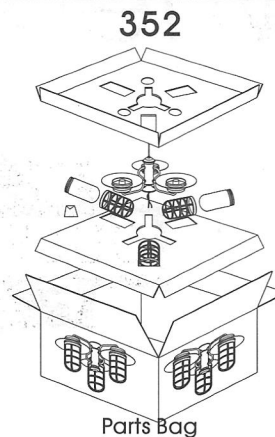

Parts Bag


Pull Chain Knob	1pc.
Wire nuts	2pcs.
Hex Nut	1pc.
Spring Washer	1pc.
Small Screw	
Driver	1pc.

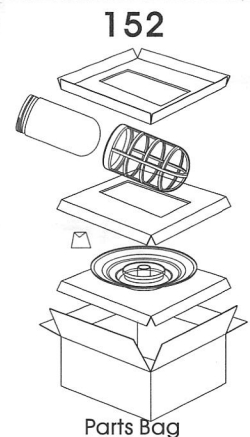


Parts Bag

Pull Chain Knob	1pc.
Wire nuts	2pcs.
Hex Nut	1pc.
Spring Washer	1pc.
Small Screw	
Driver	1pc.

Unpack and Inspect light kit carefully to ensure all contents are included.

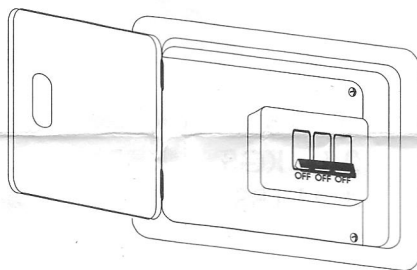

1. To reduce the risk of fire, electric shock, or personal injury, disconnect the electrical supply circuit to the fan before installing light kit.

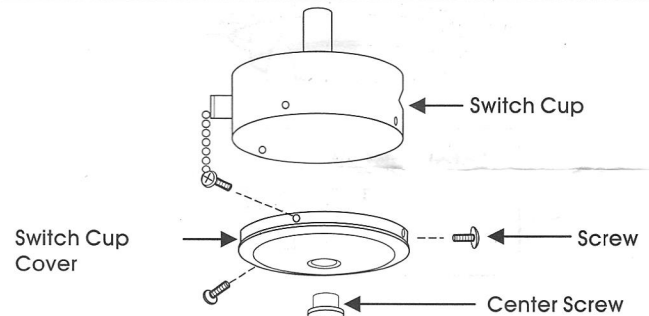

2. (1) Detach The Switch Cup Cover from the fan. It is held in place by three screws.  
 (2) Remove the center screw from the Switch Cup Cover.

### 3. Make wire connections

Insert wires from Light Kit through center hole of Switch Cup Cover.



Thread the Light Kit onto Switch Cup Cover and secure with Spring Washer and Hex Nut.

- A. Terminal Block Style** ---- Loosen screws on open end of Terminal Block to accept new wires from Light Kit.
- (1). Insert White Wire from Light Kit into Terminal Block on the side where White Wire extends to fan. Secure Wire by tightening screw with Small Screw Driver.
  - (2). Insert Black (or Blue) Wire from Light Kit into Terminal Block on the side where blue (or black) wire extends to fan. Secure wire by tightening screw with Small Screw Driver.

**B. Wire Nut Style** ----


- (1). White wire from Light Kit to white wire from fan and connect by wire nut.
- (2). Black or blue wire from Light Kit to black or blue wire from fan and connect by wire nut.

### A. Terminal Block Style

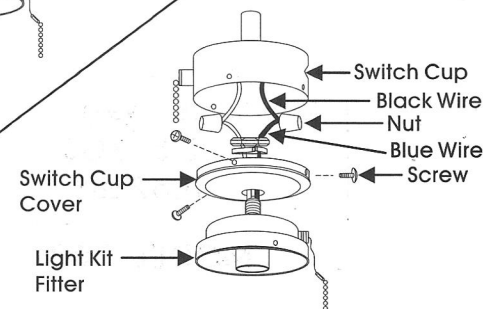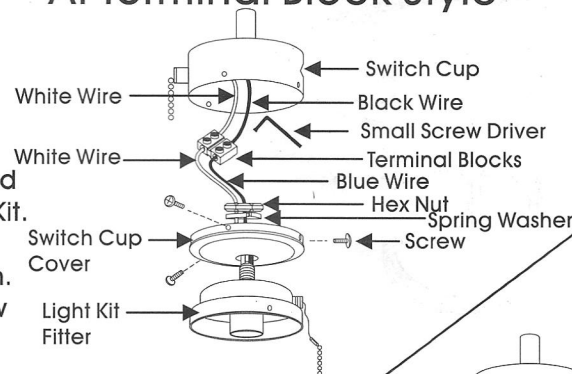


### B. Wire Nut Style


151




4. Cut and remove shipping belt that holds spring clips. It prevents broken glass.



5. Attach glass to fixture and secure using spring clips.

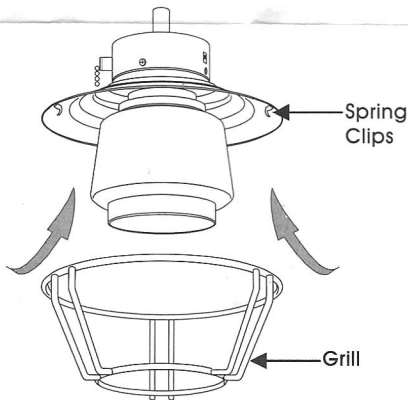


6. Attach grill to fixture and secure using other spring clips.

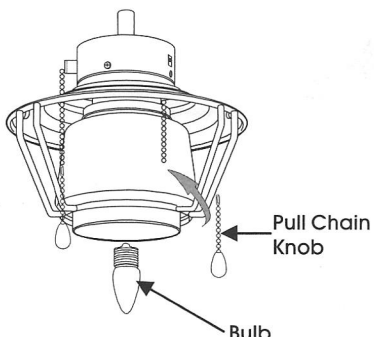


7. Install bulb to lamp holder and connect pull chain knob to pull chain.


163

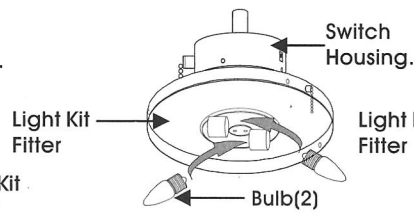


4. Install bulbs (2) to lamp holders on light fixture.

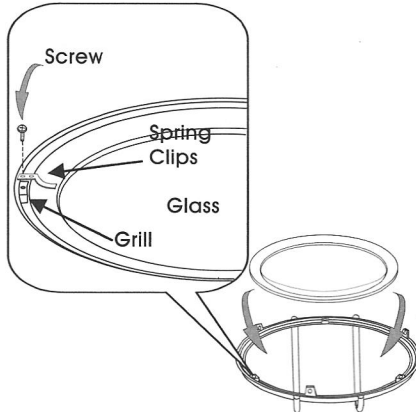

5. Place the glass onto grill & secure the glass with three screws / spring clips on grill.




6. Attach grill and glass shade assembly to light fixture with three (3) screws.




7. Connect pull chain knob to pull chain.


352




4. Install bulb to lamp holders.



5. Attach glass shades (3) to light fixture by threading tight.

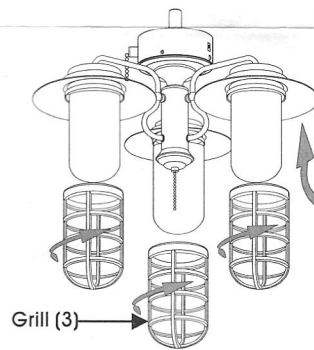


6. Attach grills (3) to light fixture by threading tight.




7. Connect pull chain knob to pull chain.


152

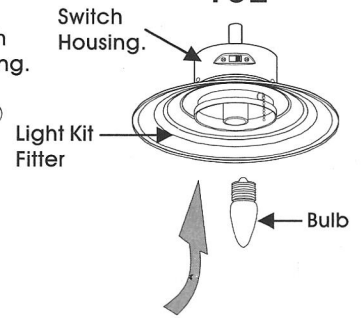


4. Install bulb to lamp holder.



5. Attach glass shades to light fixture by threading tight.

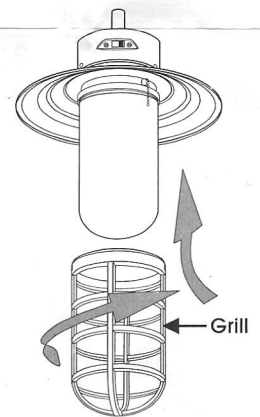

6. Attach grill to light fixture by threading tight.



7. Connect pull chain knob to pull chain.